



the safe way to transport luggage on escalators

over 30.000 trolleys have been delivered since the start of the program



Why choose Europrinter?

- safest operation on escalators, TUV certified
- additional brake lifting technology allows for pulling and pushing with scooters
- hygienic cranked round handle with transparent anti-bacterial powder coating



Why choose Wanzl trolleys?

- most reliable and most durable wheels on the market, type Wanzl Bonded On, Ø 200 mm at rear, Ø 180 mm at front, smooth rolling, non-marking with double sealed precision ball bearings 6202ZZ DIN 625, carrying capacity of 180 kg each
- almost maintenance-free, self adjusting brake mechanism covering up to 12 mm wheel abrasion
- anti-thread covers on each side of the wheels protecting from residuals, such as sand, dust or hair
- strong back wheel covers, shock absorbing, preventing people from squeezing fingers between brake and wheel section
- vertical tube in oval design 40 x 25 x 2,2 mm results in 40% more stability and durability compared with round tubes
- cold rolled round tubes 25 x 2,0 mm
- UV resistant injection molded plastic parts in solid and stiff Polyamide, in-house production
- unparalleled stability, extra-long lifetime and minimal maintenance cost

Why choose Wanzl?

- vertical integration from product development and design over bending, welding and surface treatment
- wide flexibility in customizations due to in-house processes and production
- highest possible precision and throughput due to use of robotics
- best corrosion protection due to fully owned galvanizing and powder coating facilities, surface protection approx. 70 µm
- in-house test standards guarantee the most robust luggage trolley on the market
- availability of spare parts guaranteed over at least 10 years
- worldwide presence with subsidiaries and local sales partners guarantees quick and reliable response times



technical details – standard features



material	galvanized steel, chrome-plated
surface	transparent polyester-coated
own weight	41 kg
static/dynamic load capacity	500 kg / 250 kg
nesting distance	330 mm
castors	2 x Ø 200 mm, type Bonded On (rear, fixed) 2 x Ø 180 mm, type Bonded On (front, twin-swivel)
brakes	self-adjusting Dead-Man brakes
plastic parts	RAL 7016, RAL 5002, UV resistant
visible advertising space	main frame side tin panels (left and right): please ask for technical drawing basket tin panel: 520 mm x 145 mm (front, outside)
handle user instructions	English, French and Spanish
basket user instructions	pictogram sticker (front, inside and back, outside)
transportation with scooter	pushing mode with remote control (standard) pulling mode without remote control (alternative)
turning radius	6000 mm



technical details – optional features*



coin box for refund function

adapter for vending system

short range passive transponder for inventory and maintenance



long range passive transponder to enable wanzl connect®
(please contact us for further information to trolley depot, entrance and exit tracking)

further plastic part colours upon request

customized handle prints upon request

logo sticker for basket front, outside, and main panel prints on request


technical changes reserved

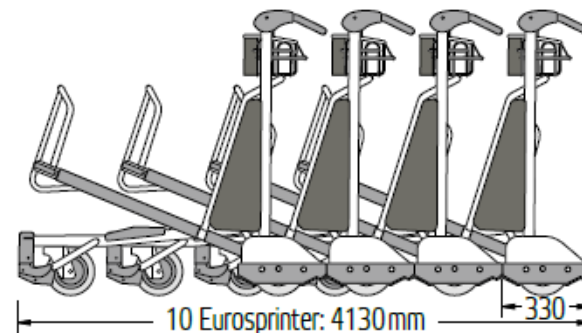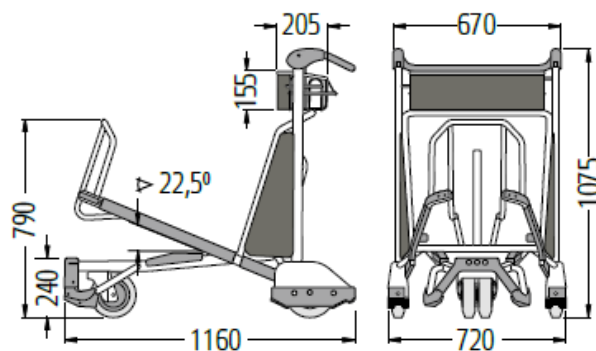

*might be subject to surcharge

references*

wanzl

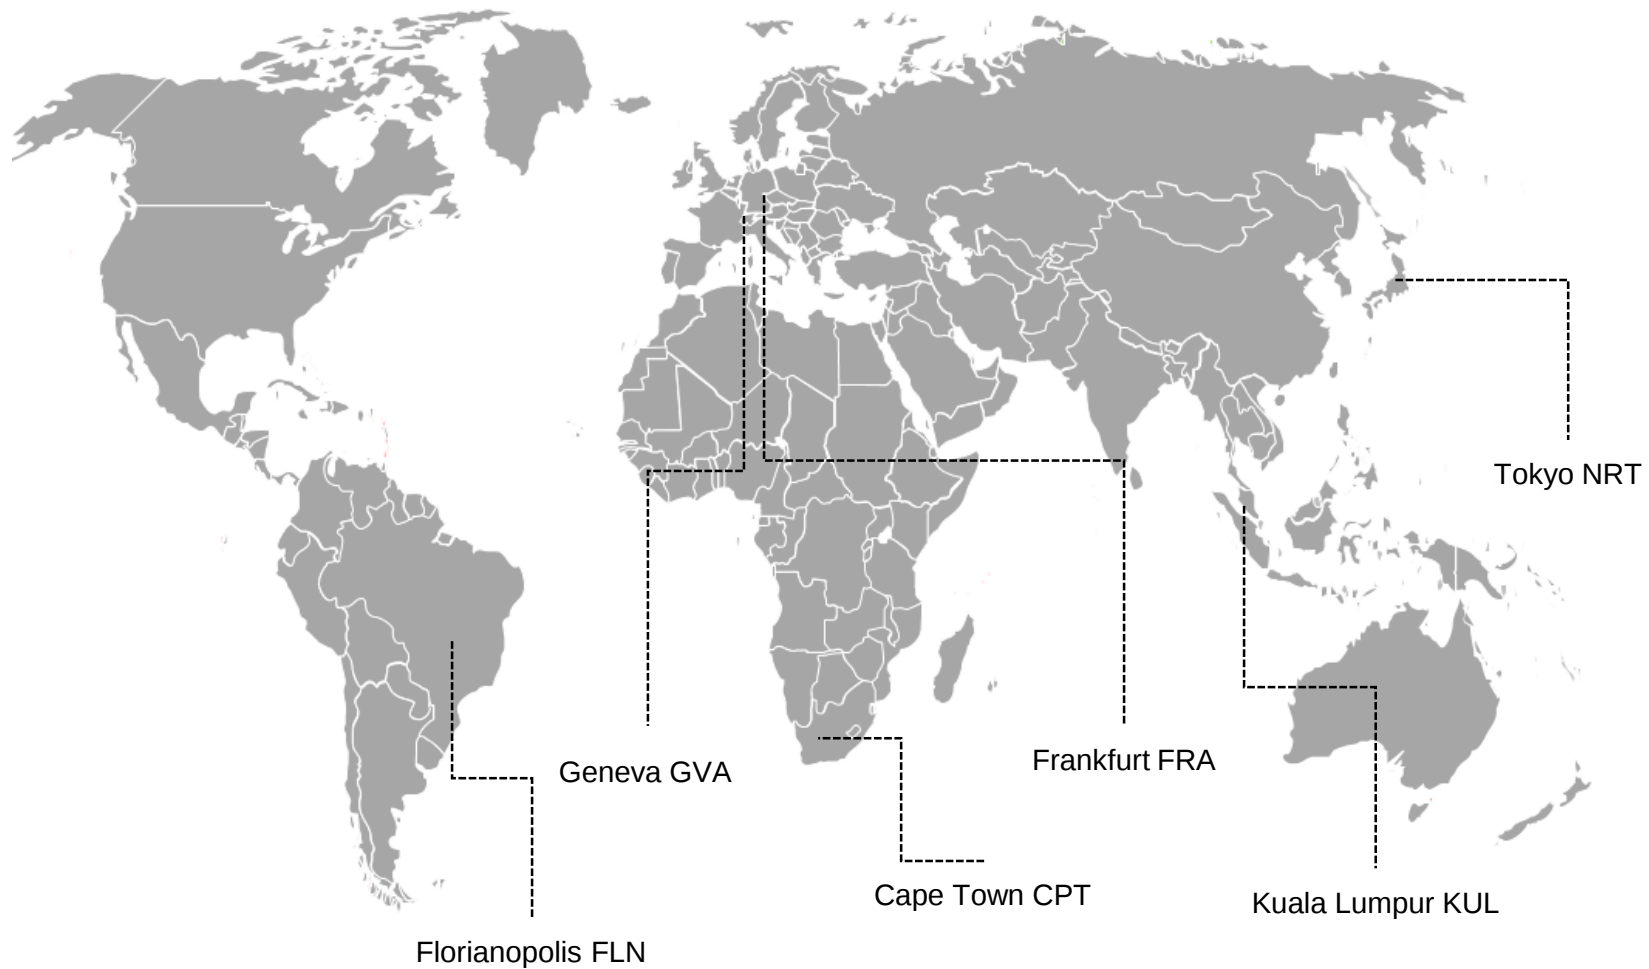

**excerpt only*

strong partnerships_MADE BY WANZL